



Acid and Corrosive Liquids Storage Cabinet

Features:

- Built in double wall E.G steel with 38mm of insulating air space, in chemical resistant epoxy finish.
- 3 units (ACSC-600), 2 units (ACSC-450) or 1 unit (ACSC-300) of heavy duty adjustable shelves with solid PP Lining. (ACSC-120) supplied with fiber glass trays.
- 50 mm liquid-tight containment sump.
- Lateral high and low vent 50mm diameter.
- Heavy duty pivot hinges.
- Manual full opening doors.
- 2 point lock with key system and handle.

Option:

- Additional shelf.
- Ventilation or filtration boxes.



Model: ACSC-300




Model: ACSC-450



Adjustable shelves with solid PP lining



Liquid-tight Containment sump

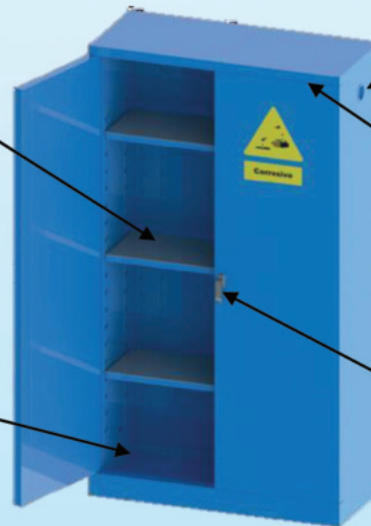

Model: ACSC-600



Vent



Heavy duty pivot hinge



2-point lock with key system

SPECIFICATIONS

Model	ACSC-120	ACSC-300	ACSC-450	ACSC-600
Body construction	1.2mm thick electro-galvanize steel sheet in high quality epoxy coating.			
Capacity	(45 liters) 12 gallons	(113 liters) 30 gallons	(170 liters) 45 gallons	(220 liters) 60 gallons
Adjustable Shelves supplied	1 pc	1 pc	2 pcs	3 pcs
Shelve dimensions (mm)	520Wx380Dx35H	1000W x356D x 30H		
Door type	Twin doors, 2 point latch			
External dimensions (mm)	615Wx500Dx970H	1090Wx460Dx1120H	1090Wx460Dx1650H	1090Wx460Dx1950H
Internal dimensions (mm)	530Wx380Dx855H	1005Wx390Dx1025H	1005Wx390Dx1560H	1005Wx390Dx1860H
Weight	48kg	105kg	140kg	170kg

Manufactured In Accordance with OSHA & NFPA code 30 specifications.